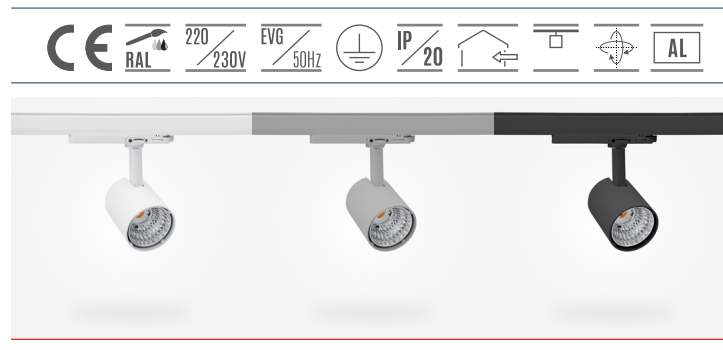


LIDER G

reflektor / spotlight

Charakterystyka:

reflektor typu shoplight LED, do montażu na szynoprzewodzie

Opis techniczny:

obudowa i uchwyt reflektora wykonane z odlewu aluminiowego, malowane proszkowo w kolorze czarnym, białym lub szarym, odbłyśnik

Montaż:

na szynoprzewodzie

Zastosowanie:

obiekty handlowe, biurowe, pomieszczenia reprezentacyjne, galerie, muzea, salony samochodowe

type	product	kolor/colour	(Ra)	temperatura barwowa/colour temperature							kąt świecenia/beam angle					max moc oprawy/ maximum power	max strumień oprawy/ maximum lumen output
Reflector	LIDER G	□ ■ ■	>80 >90	2500K	2700K	3000K	3500K	4000K	5000K		15°	23°	38°	45°	60°	max 20W	max 2655lm
R	LG	WH GY BK	8 9	25	27	30	35	40	50		15	23	38	45	60		

przykład oznaczenia zamawianego produktu/example code: **RLG0WH84045C3609501**



Characteristics:

shop-light lamp LED, assembled on the bus-duct

Technical description:

fitting and handle of the lamp made from aluminium casting pulverised in black, white or grey colour, reflecting element

Mounting:

on the bus-duct

Application:

commercial and office facilities, elegant halls, galleries, museum, car showrooms